

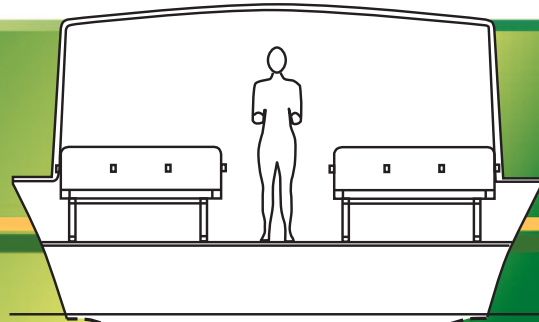


◆ **Ferry Boat &  
Water Taxi Consulting**  
◆ **Boat Building & Design**

**Bob Bekoff, LLC**

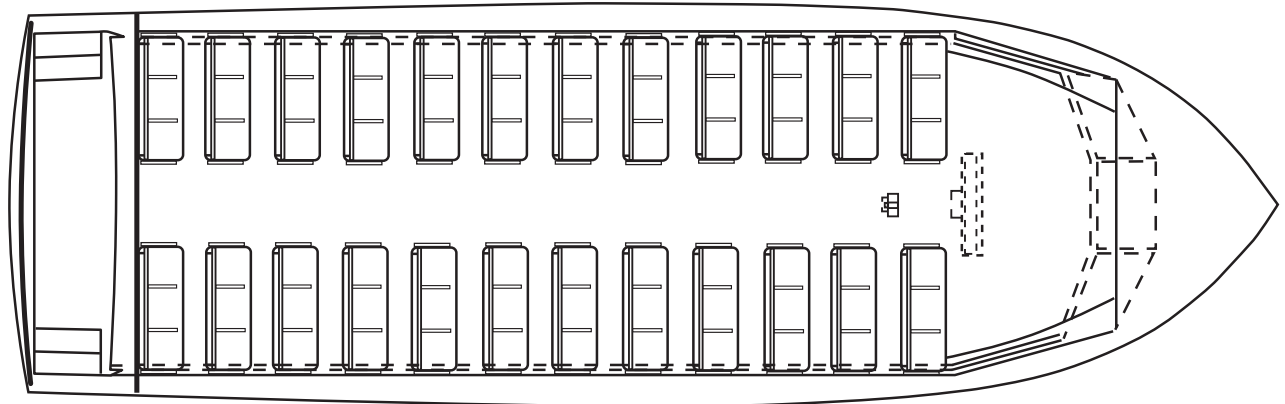

## 50' / 72 VIP Seat Passenger Ferry Boat

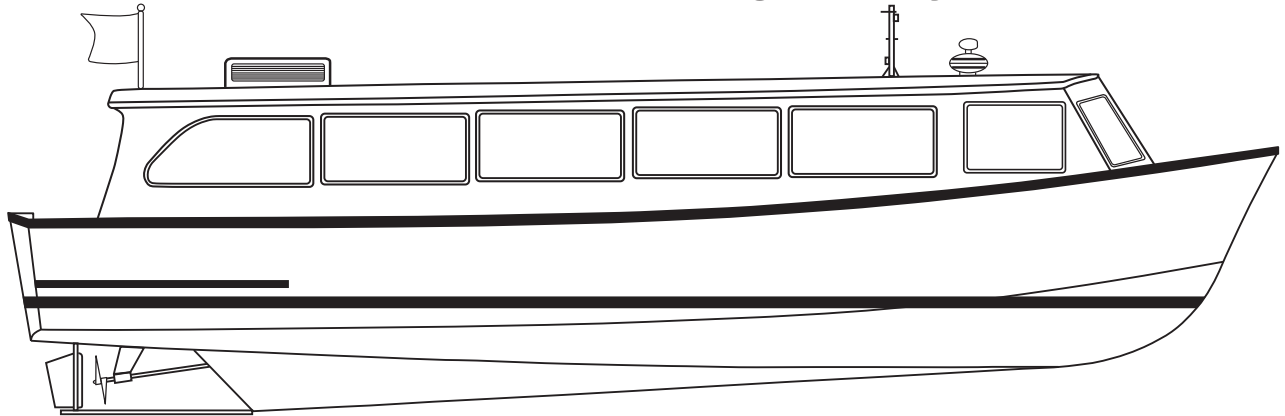

### Specifications

Length overall: 50'  
Beam overall: 16' - 6"  
Draft loaded: 4' - 6"

USCG COI: up to 72 passengers & 2 crew on a Coastwise route. All USCG required equipment included

Construction: reinforced solid fiberglass hull with vinylester skin for blister protection & molded white gel coat exterior. Five (5) watertight compartments for damage stability, molded keel for directional stability, SKEG

Superstructure: molded fiberglass composite with tempered glass windshields, fixed side windows, 36" hinged door & 2 sliding windows in aft bulkhead

Decks: fiberglass composite with non-skid finish, self bailing  
Railings: rigid vinyl rub rail bolted through gunwale, rigid vinyl quarter guard rail, 10' per side

Propulsion: Cummins 610hp @ 2100 rpm  
Marine transmission 2:1 ratio

Service Speed: 22 knots

Tankage: 360 gal welded aluminum fuel tank

Seating: pedestal mounted helm seat, 72 VIP seats, port & starboard, boarding stations with welded railings

12V DC System: 8D battery, breaker panel, all required lights

Steering: Sea Star hydraulic system

Air Conditioning: 60,000 BTU Thermo-King engine driven system, digital controls at helm station.

Bilge ventilation: natural

Bilge pumps: Five (5) Rule 12V pumps with automatic switches, S.S. thru-hulls, 10 GPM portable bilge pump

*For additional information and specifications contact:*

954-471-7538 Fax: 954-302-2040 / [Bob@BobBekoffConsulting.com](mailto:Bob@BobBekoffConsulting.com) / [BobBekoffConsulting.com](http://BobBekoffConsulting.com)